

Diagram illustrating the process of inflating a tire using a pump.

If used frequently, oil the wheelsets with a drop of non-resinous, acid-free sewing machine oil! In order to achieve the best possible running and traction properties, it is advisable to run the locomotive in for 25 minutes forwards and 25 minutes in reverse without load. Clean rails are essential for good performance.

The PIKO SmartDecoder XP Sound Next18 is a powerful multiprotocol sound decoder of the newest generation. The decoder ensures a high-level noiseless sound experience. It can be used with DCC and Motorola® digital systems and it is also operable in analogue mode on DC and AC layouts. The decoder is RailCom® and RailComPlus® capable. The innovative PIKO SmartDecoder XP Sound independently recognizes the respective operating mode and has a wide range of setting options for the additional functions. The decoder works with an auto-adaptive motor control for a silky smooth operation and is suitable for a continuous current consumption of up to 1A. The amplified function outputs can handle up to 0.5A each. Its many braking section functions include ABC braking, ABC automatic shuttle, as well as ABC slow speed. The sound part can control fixed function outputs as well as the motor output of the decoder. For example, the lighting of a diesel locomotive flickers when the engine is started.

F0	Light on / off	F9	Air compressor	F18	Conductors signal
F1	Motor noise - diesel loco	F10	Driver cab door open / close	F19	Station announcement
F2	Low Tone Horn	F11	Engine room door open / close	F20	Info for groups
F3	Motor 2	F12	Driver cab window open / close	F21	Release compressed air
F4	Train lighting: the loco pulls	F13	Side window open / close	F22	Sanding
F5	Train lighting: the loco pushes	F14	Fuel feed pump	F23	Curve squeal on / off
F6	Sludge removal	F15	Feed pump	F24	Rail Clack Sound on / off
F7	Shunting mode	F16	Preheater	F25	Volume control
F8	Handbrake apply / release	F17	Coupling	F26	Soundfader

CV	Description	Area	Value*
1	Locomotive address	DCC 1 - 127 Mot. 1 - 80	3
2	Minimum speed (the speed from 0 until the locomotive is running at speed step 1)	0 - 255	1
3	Acceleration delay	0 - 255	90
4	Braking rate	0 - 255	42
5	Maximum speed (must be greater than CV 2)	0 - 255	200
6	Average speed (must be greater than CV 2 and less than CV 5)	0 - 255	100
7	Software version (The processor can be updated)	-	differentely.
8	Manufacturer identification decoder reset, CV6 = 8	-	162
Decoder operating mode		Value	
12	Bit 0=1 DC (analog operation; direct current) on	*11	
	Bit 2=1 DCC data format on	*4	
	Bit 4=1 IAC (analog 3-rail operation; alternating current)	*16	
18	Bit 1=1 Motorola® data format on	*32	
	Long locomotive address	1 - 10239	1000
	17 = high Byte	192 - 231	195
	18 = low Byte	0 - 255	232
Brake signal settings (automatic stop)		Value	
27	Bit 0 = 1 -> ABC (Automatic Brake Control) right rail positive	1	
	Bit 1 = 1 -> ABC left rail positive	2	
	Bit 4 = 1 -> DC; opposite direction of travel	16	
	Bit 5 = 1 -> DC; same direction of travel	32	
DCC standard configuration		Value	
29	Bit 0=0 Normal direction of travel	*0	
	Bit 0=1 Opposite direction of travel	1	
	Bit 1=0 14 speed steps	*2	
	Bit 1=1 28 speed steps	0	
	Bit 2=0 Digital mode only	*4	
	Bit 2=1 Automatic analog/digital recognition	0	
	Bit 3=0 RailCom® turned off	*8	
	Bit 3=1 RailCom® turned on	0	
	Bit 4=0 Speed steps over CV 2, 5, and 6	*16	
	Bit 4=1 Use the characteristic curve from CV 67 - 94	0	
	Bit 5=0 Short address (CV1)	*32	
	Bit 5=1 Long address (CV 17/18)	0	
30	Error codes for the motor, thermal overload, and function outputs: 1 = motor error, 2 = thermal overload error, 4 = function output error, 8 = fault sound memory	0 - 15	0

- Factory setting

Bezpečnostní pokyny v jiných jazycích
naleznete na adrese: **www.piko-shop.de**






Bitte bewahren Sie diese auf.

This diagram shows the exploded view of the LEGO Technic train engine. The main body is a long, rectangular structure with a rounded front and a flat top. It features several windows and doors. The wheels are shown as separate components, with dashed lines indicating their assembly points. Various connectors and pins are also shown, with dashed lines indicating their assembly points on the main body.

This exploded view diagram illustrates the assembly of the PSD XP Sound Next18 locomotive. The main body of the locomotive is shown at the bottom. Above it, the sound module is positioned, with dashed lines indicating its placement and the screws used to secure it. To the left, the motor assembly is shown, with dashed lines indicating its connection to the sound module. Below the sound module, the battery pack is shown, with dashed lines indicating its insertion into the locomotive's chassis. The diagram also shows the placement of the sound module's wiring and the connection of the motor assembly to the sound module.


0-12 V

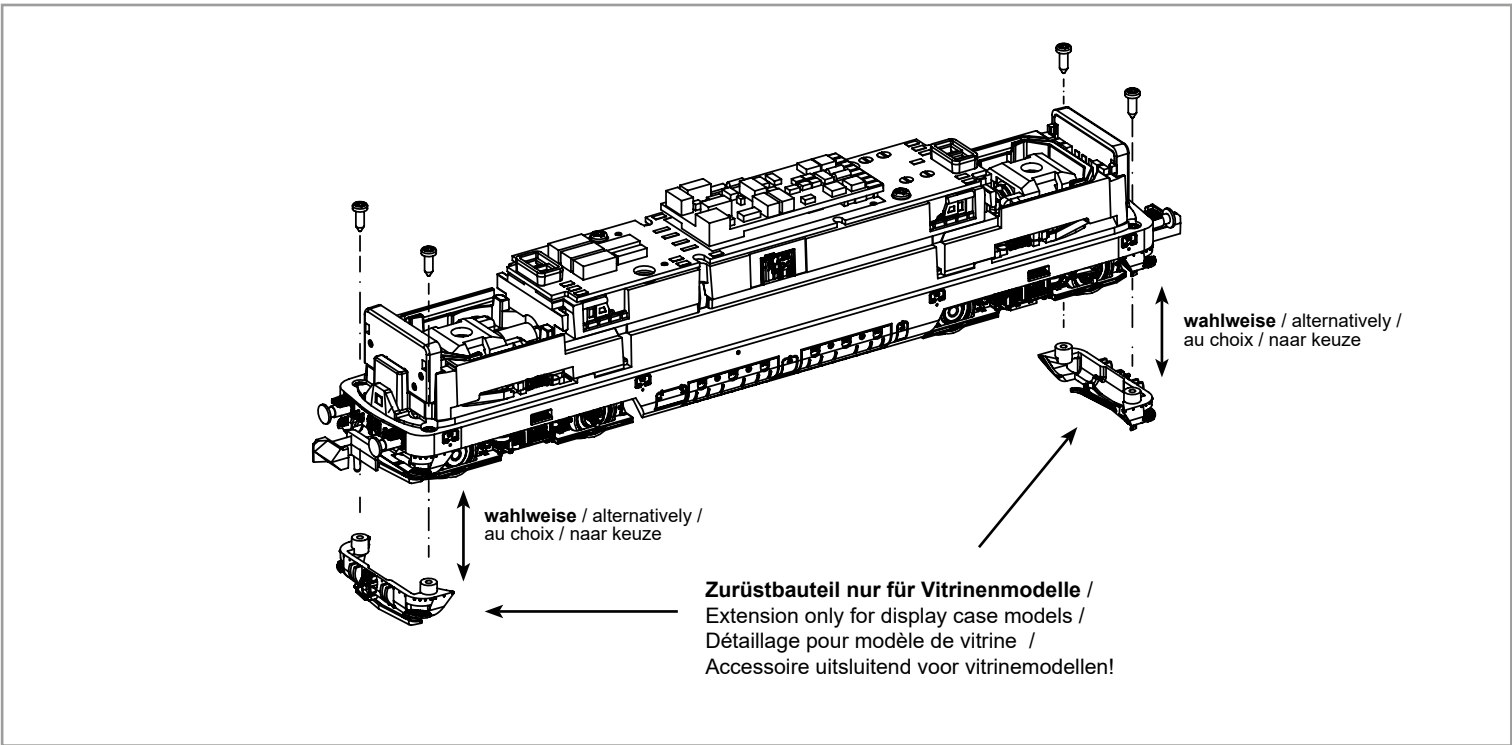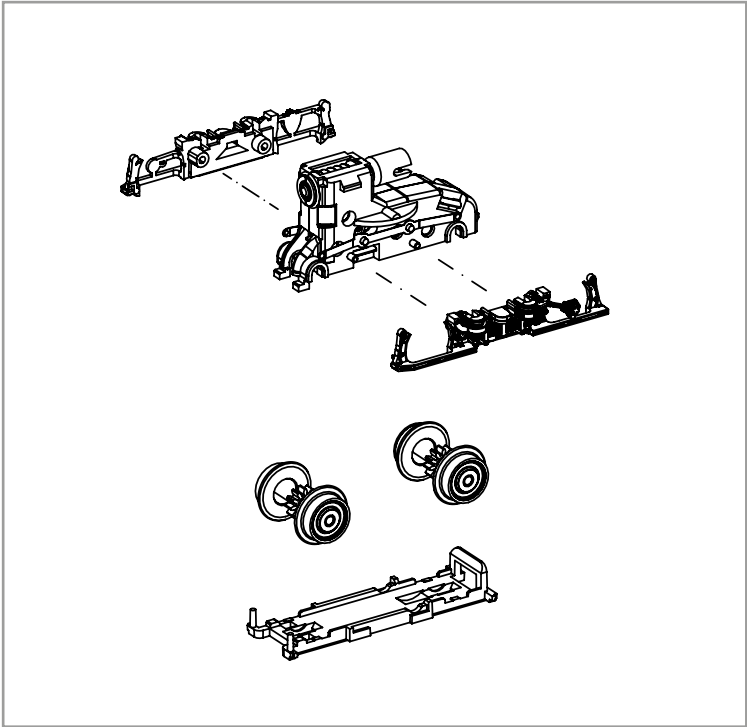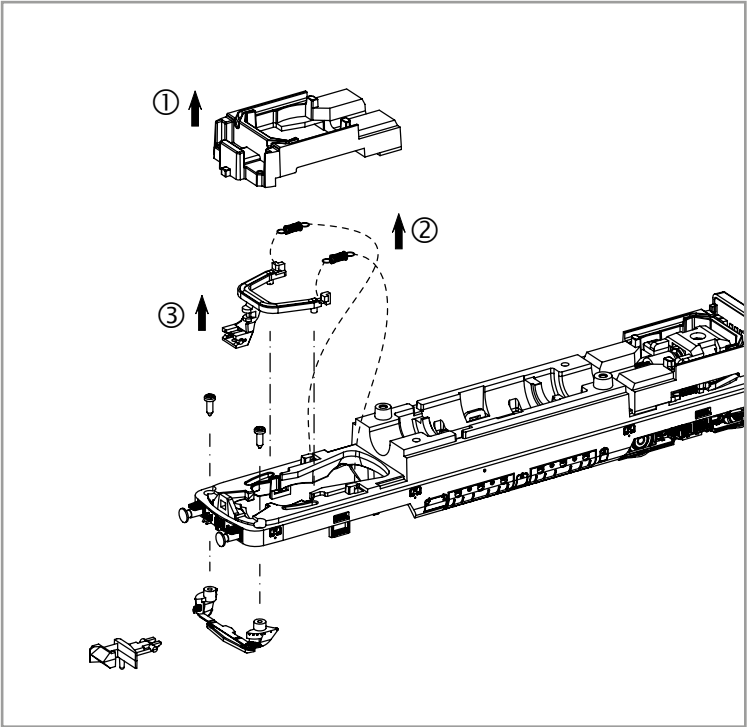

ERSATZTEILE DIESELLOKOMOTIVE V 200.1 / BR 221 N

Spare parts for electric locomotive V 200.1 / BR 221 N

Bei Ersatzteilanforderung bitte immer die vollständige Ersatzteil-Nr. angeben • Please order the wanted spare part with the complete spare part item number.

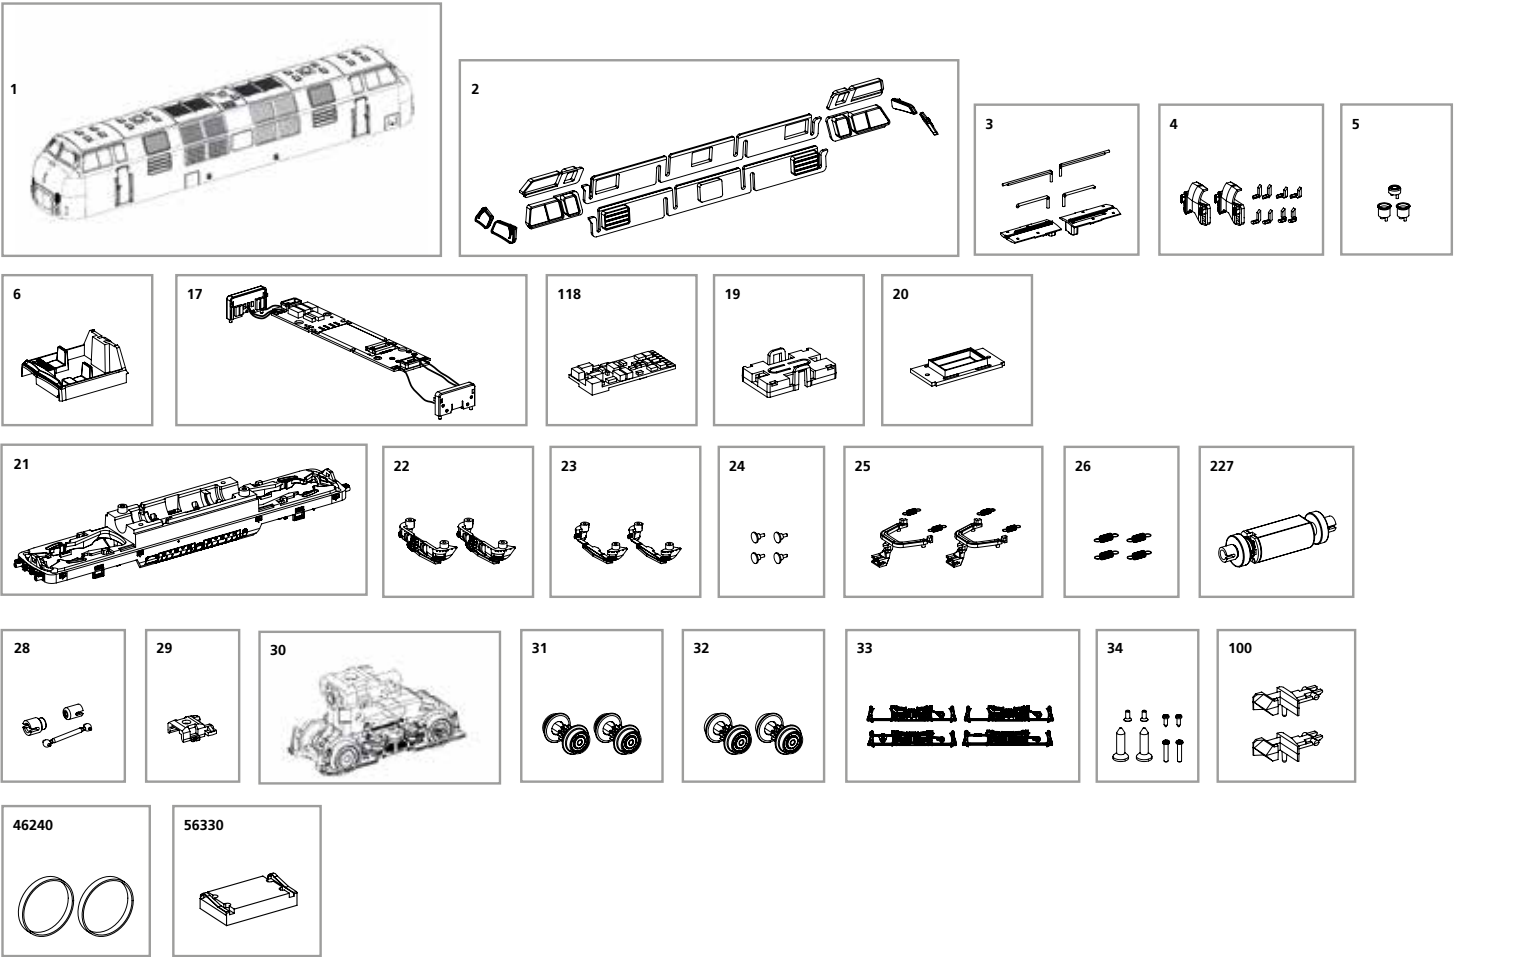

Bezeichnung / Description	ET-Nr. / spare part N°	PG*
Gehäuse, komplett / Body, complete	40510-01	15
Fenster / Windows	40500-02	9
Leuchstab Spitzenlicht-Führerhaus / Light bar front top, driver's cab	40500-03	7
Leuchstäbe Front / Light bars front	40504-04	8
Auspuff (3-tlg.) / Exhaust (set of 3)	40500-05	7
Führerstand / Driver's cab	40500-06	6
Hauptplatine mit Beleuchtungsplatinen und Kabel / Main board with lightboards and wires	40500-17	15
PIKO SmartDecoder XP Sound Next18 / PIKO SmartDecoder XP Sound Next18	40501-118	22
Lautsprechergehäuse mit Kontakten / Body loudspeaker with contacts	40501-19	7
Lautsprecherabdeckung / Cover loudspeaker	40500-20	5
Rahmen / Chassis	40510-21	12
Frontschürze geschlossen (2 Stck.) / Front spoiler (2 pcs.)	40500-22	8
Frontschürze offen (2 Stck.) / Front spoiler (2 pcs.)	40500-23	8
Puffer (4 Stck.) / Buffer (4 pcs.)	40500-24	6
Kupplungsschacht mit Federn / Coupler w spring	40500-25	7

Bezeichnung / Description	ET-Nr. / spare part N°	PG*
Kupplungsfedern (4 Stck.) / Springs (4 pcs.)	40500-26	6
Motor komplett / Motor complete	40500-227	14
Kardanwelle + Buchsen / Cardan shaft + bushes	40500-28	7
Getriebeklammer / Gear box clamp	40500-29	5
Getriebe / Gearbox	40500-30	13
Radsatz mit Zahnrad und Haftreifen (2 Stck.) / Wheelset w gear and traction tires (2 pcs.)	40500-31	9
Radsatz mit Zahnrad (2 Stck.) / Wheelset w gear (2 pcs.)	40500-32	9
Drehgestellblenden (4-tlg.) / Truck frames (set of 4)	40500-33	8
Schrauben / Screws	40500-34	7
Kupplung (2 Stck.) / Coupling (2 pcs.)	40350-100	6
ET aus unserem Standard-Programm / Spare parts standard range		
Haftreifen (10 Stck.) / Traction tires (set of 10)	46240	
Ersatzlautsprecher / Replacement loudspeaker	56330	

*Preisgruppe *price category

EU-Konformitätserklärung
Hiermit erklärt die PIKO Spielwaren GmbH, dass das Produkt in seiner Konzeption und Bauart sowie in der von uns in Verkehr gebrachten Ausführung den grundlegenden Sicherheits-, Gesundheits- und Kompatibilitätsanforderungen der genannten Richtlinien und Verordnungen entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar:
<https://www.piko.de/konform>

EU Declaration of Conformity
PIKO Spielwaren GmbH hereby declares that the product in its design and construction as well as in the version placed on the market by us complies with the basic safety, health and compatibility requirements of the directives and regulations mentioned. The full text of the EU Declaration of Conformity is available at the following internet address: <https://www.piko.de/konform>

Hinweis zur Reklamation eines Artikels:
Vielen Dank für Ihr Vertrauen in die PIKO Modelle. Wir hoffen, dass Sie mit dem Modell zufrieden sind und lange Freude daran haben. Sollten Sie dennoch Probleme mit Ihrem PIKO Produkt haben und wollen dieses reklamieren, bitten wir Sie, den unter www.piko-shop.de/de/widerruf hinterlegten Reklamationsschein auszufüllen und diesen dem reklamierten Artikel beizulegen. Vielen Dank.

Complaint note:
Thank you for your trust in PIKO models. We hope that you are satisfied with the model and enjoy it for a long time. Should you nevertheless have problems with your PIKO product and wish to complain it, we ask you to fill in the complaint form, which you can find at www.piko-shop.de/en/widerruf, and enclose it with the complained item. Thank you very much.